

Bonded coatings for industrial coating

www.oks-germany.com



Photo © WMV Apparatebau GmbH



FUNCTIONAL COATING

FOR HIGHEST DEMANDS

40 YEARS OF TRIBOLOGICAL EXCELLENCE

QUALITY – MADE IN GERMANY

How bonded coating systems function




Definition of a bonded coating system

Bonded coatings are high-performance lubricants that form tribologically optimized layers on the workpiece surface. Their composition is comparable to that of an industrial coating. However, the colouring pigments are replaced by solid lubricants.

The layer formed after the application combines the outstanding tribological properties of solid lubricants, such as PTFE, graphite, MoS₂ and boron nitride, with the mechanical properties of the binder systems.

How bonded coatings function

Through the use of bonded coatings, thin composite material layers can be applied to almost any material. The tribological and mechanical properties, such as temperature and media resistance, coefficients of friction or corrosion protection, can be influenced by the use of a corresponding bonded coating. This allows you to change the surface functionality of the materials.

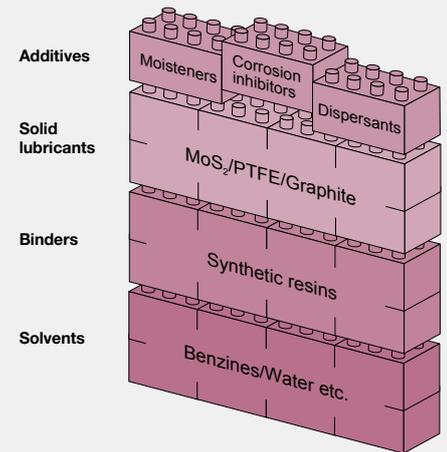

1. Coated material


After having hardened, bonded coatings form a thin film. This consist of dry lubricants embedded in an organic or inorganic binder matrix.

2. Run-in bonded coating

The uppermost coating layer is removed in the run-in phase. This allows maximum surface contact between the friction partners and thus optimum power transfer between the friction partners.

3. Transfer film

Solid lubricants are released when mechanical loads occur on the sliding surface. These are enriched as a transfer film on the surfaces of the friction partners and thus reduce the specific coefficient of friction.

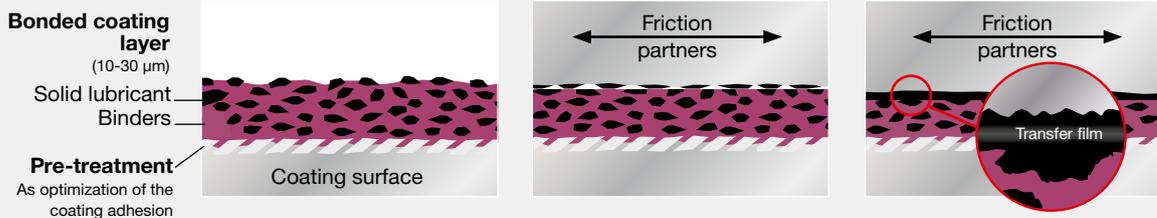


Substrate	Operating conditions	Bonded coating
Material	Vacuum	Excellently suitable
Metal, plastic, elastomer, wood, concrete	Low temperature	Highly suitable
	High temperature	Excellently suitable
Surface finish	Low speed	Excellently suitable, low stick-slip
No sharp edges Coating surface: R _a =1–2 µm Friction partners: R _a = smaller than 1 µm R _a = Roughness	High speed	Excellently suitable
	Environmental risk	Very low environmental risk
Tolerances	Contamination of the bonded coatings	Low
Take maximum or minimum layer thickness of coating into account	Contamination by bonded coatings	Low
	Relubrication	Not required

The enclosed product overview will help you when selecting a suitable bonded coating for your individual application.

Processing of bonded coatings

1. Pre-treatment



Prerequisite for the best possible performance of a bonded coating is the optimum adhesion of the coating on the surface of the workpiece. Therefore it may be necessary to pre-treat it either **mechanically, e.g. through sandblasting**, or **chemically, e.g. through phosphating**.



Workpieces before the coating

2. Cleaning



Ensure that the surface to be coated is free of residues, grease and dust.

3. Application

Description

Advantages

Disadvantages

Workpieces

3.1 Spray coating



The bonded coating is applied extensively like a decorative paint or partially with spray gun. The coating procedure can be carried out manually or automated.

- Homogeneous surface quality
- Partial coating possible

- High work input per part
- High coating consumption

- Individual parts

3.2 Dip spinning



The parts to be coated are immersed in a reservoir with bonded coating. Subsequently the superfluous coating is spun off. This can result in imperfections at the contact points of the individual parts. These are eliminated as a rule by means of several coating processes.

- Complex geometries possible (e.g. drilled holes)
- Low coating consumption
- Very inexpensive

- Imperfections at the contact points

- Bulk goods

3.3 Spray drum coating




The coating is sprayed onto the bulk goods in the drum. Through the rotation of the drum and the resulting reciprocal rubbing of the coated parts the surface is smoothed during coating.

- Homogeneous surface quality
- No sticking
- Low coating consumption
- Inexpensive

- Suitable only for simple geometries, (e.g. washers, bolts, pins, etc.)

- Bulk goods

4. Drying /curing



There are air-drying and heat-curing coatings. The temperatures, curing or drying periods have to be observed to achieve optimal performance of the coating layer. These product-specific data are available in the product information.



Workpieces after the coating

5. Checking of the coating



For simple quality control the **coating adhesion** can be checked in addition to the **layer thickness**.

Application of bonded coatings



Examples of workpieces for bonded coating

Fitting parts, fastening elements, seals, anchors, springs, positive-locking connections, pivoting bearings, threaded spindles, slide-ways, friction bearings, sliding disks, chain parts, rocker levers, bearing bolts, metal profiles, metal forming, rivets, screws, nuts, switch cams, clamping sleeves, retaining pawls, chipboard screws, hinges, metal fittings, lock parts, shafts, gearwheels.

OKS – your professional partner

Our high tribologic expertise, our comprehensive technical service, smooth availability and our innovative solutions for specific lubricant requirements make us a preferred partner to demanding customers the world over.

Follow us on
LinkedIn



CONSULTING AND SALES

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects or, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. **Prior to use, the customer must conduct its own testing to prove suitability.** No liability accepted for spelling mistakes, typing errors, miscalculations and translation errors. The data are subject to change for the sake of progress. Photo Pg. 1 © WMV Apparatebau GmbH ® = Registered trademark

OKS Spezialschmierstoffe GmbH

Ganghoferstr. 47
82216 Maisach
GERMANY

Phone: +49 8142 3051-500
info@oks-germany.com

a brand of
 FREUDENBERG

For a world in motion



		Product	Designation	Technical Data	Colour, Solid Lubricant	Characterisation	Examples of use
thermosetting	Drying Base	OKS 589	MoS ₂ PTFE Bonded Coating, thermosetting	Operating temperature: -70 °C to +250 °C Press-fit test: $\mu = 0.07$, no chatter Thread friction (M10/8.8): μ total = 0.08 Optimal coating thickness: 10 to 20 μ m	<ul style="list-style-type: none"> • matt black • MoS₂, graphite, PTFE 	<ul style="list-style-type: none"> • Dry lubrication of sliding surfaces under heavy loads, low speeds and corrosive influences • Fully effective even after long standstills • No adhesion of dust and dirt 	<ul style="list-style-type: none"> • Increased protection against wear of otherwise not accessible slide areas
		OKS 510 OKS 511	MoS ₂ Bonded Coating, fast-drying	Operating temperature: -180 °C to +450 °C Press-fit test: $\mu = 0.07$, no stick-slip Optimal coating thickness: 10 to 15 μ m	<ul style="list-style-type: none"> • grey-black • MoS₂, graphite 	<ul style="list-style-type: none"> • Dry lubrication for temporary operation or long downtimes, industry environments and at low sliding speeds • Run-in lubricant in combination with oils or greases • Creates emergency-running properties • Dries at room temperature 	<ul style="list-style-type: none"> • Friction bearings, toothing and other sliding pairs with oscillating movements • For coating punching tools
		OKS 521	MoS ₂ Bonded Coating, air-hardening	Operating temperature: -180 °C to +450 °C Processing temperature: Room temperature Optimal coating thickness: 5 to 20 μ m	<ul style="list-style-type: none"> • black • MoS₂, graphite 	<ul style="list-style-type: none"> • Dry lubrication of machine elements subject to high demands • At high operating temperatures (up to 450 °C) • In dusty environment, to avoid adhesions • Run-in lubrication in combination with oil or grease lubrication 	<ul style="list-style-type: none"> • Lifetime lubrication of metal-to-metal connections at low to medium rotational speeds and high loads
solvent	air-drying	OKS 570 OKS 571	PTFE Bonded Coating	Operating temperature: -180 °C to +260 °C Press-fit test: $\mu = 0.07$ Thread friction (M10/8.8): μ total = 0.10 Optimal coating thickness: 5 to 20 μ m	<ul style="list-style-type: none"> • whitish • PTFE 	<ul style="list-style-type: none"> • Dry lubrication of sliding surfaces of different materials at low pressures, low speeds and in dusty environments • Colourless, no-soiling sliding and parting film • Prevents tribocorrosion • Dries at room temperature 	<ul style="list-style-type: none"> • For packaging machines, slide surfaces in the plastics and textile industry • Anti-stick coating of seals or sealing surfaces of all kinds
		OKS 530	MoS ₂ Bonded Coating, water-based, air-drying	Operating temperature: -35 °C to +450 °C Press-fit test: $\mu = 0.10$, no chatter Thread friction (M10/8.8): μ total = 0.05	<ul style="list-style-type: none"> • black • MoS₂, graphite 	<ul style="list-style-type: none"> • Can be sprayed onto hot surfaces • Use in a broad temperature range • Dries at room temperature • Spent sliding film can be topped up • Can be diluted with water in ratio of up to 1:5 	<ul style="list-style-type: none"> • Lubrication of heavily loaded chains when oil and grease lubrication is no longer possible
		OKS 536 	Graphite Bonded Coating, water-based, air-drying	Operating temperature: -35 °C to +600 °C Press-fit test: $\mu = 0.12$, no chatter NSF H2 Reg. No. 130416	<ul style="list-style-type: none"> • black • graphite 	<ul style="list-style-type: none"> • Lubrication of heavily loaded chains when oil and grease lubrication is no longer possible • Can be sprayed onto hot surfaces • Dries at room temperature • Spent sliding film can be topped up • Can be diluted with water in ratio of up to 1:5 	<ul style="list-style-type: none"> • For example, in annealing, stoving and baking ovens for aluminium tube manufacturing, in painting systems or in baking lines
water	air-drying	OKS 575	PTFE Water Bonded Coating	Operating temperature: -180 °C to +150 °C/+250 °C Optimal coating thickness: 5 to 10 μ m	<ul style="list-style-type: none"> • whitish • PTFE 	<ul style="list-style-type: none"> • For sliding surfaces made of different materials at low pressures, low speeds and in dusty environments • Dries at room temperature • Can be diluted with water • Prevents tribocorrosion 	<ul style="list-style-type: none"> • For packing machines • Rollers and chutes in the transport range • Non-stick coating • Separating film for casting resin applications



		Product	Designation	Technical Data	Colour, Solid Lubricant	Characterisation	Examples of use
air-drying	solvent	OKS 1300 OKS 1301	Sliding Film, colourless	Operating temperature: -60 °C to +100 °C Thread friction (M10/8.8): μ total = 0.08 – 0.10	• colourless	<ul style="list-style-type: none"> • Thread coating • Sliding film for plastic, wood and metal • Dry sliding film fast to handling with UV indicator • Prevents seizing • For all screw materials • Broad range of uses, in particular for precoating small and mass-produced parts 	• For assembly of axial face seals or dry lubrication in textile or paper-processing machines
	water	OKS 1710	Sliding Film for Screws, water-based concentrate	Operating temperature: > +60 °C Thread friction (M10/8.8): μ total = 0.08 – 0.14 (depending on concentration and surface)	• milky-white	<ul style="list-style-type: none"> • Thread coating for controlled assembly • Dry sliding film fast to handling, verifiable with UV indicator • Can be diluted with water in a ratio of up to 1:5 • Controlled friction coefficients • Economic precoating 	• Coating of threads with galvanized surfaces and high-alloy steel threads
		OKS 1750	Sliding Film for Wood Screws, water-based concentrate	Operating temperature: > +70 °C Thread friction (M10/8.8): μ total = 0.08 – 0.14 (depending on concentration and surface)	• yellowish	<ul style="list-style-type: none"> • Dry film fast to handling • Verifiable with UV indicator • Can be diluted with water in a ratio of up to 1:5 • Controlled friction coefficients 	• Coating of threads with galvanized surfaces, e.g. screws for flakeboards
		OKS 1765	Sliding Film for Thread-Cutting Screws, water-based concentrate	Operating temperature: > +70 °C Thread friction (M10/8.8): μ total = 0.06 – 0.15 (depending on concentration and surface)	• milky-white	<ul style="list-style-type: none"> • Dry film fast to handling • Verifiable with UV indicator • No cold welding • Can be diluted with water in a ratio of up to 1:5 • Controlled friction coefficients 	• Coating of thread-cutting screws made of aluminium alloys, high-alloy steels, galvanized and austenitic steels
		OKS 100	MoS ₂ Powder, high degree of purity	Operating temperature: -185 °C to +450 °C (up to +1,100 °C in vacuum, up to +1,300 °C in inert gas) Particle size: 16.0 – 30.0 µm, max. 190.0 µm	<ul style="list-style-type: none"> • grey-black • MoS₂ 	<ul style="list-style-type: none"> • To improve the sliding properties of machine elements • Run-in lubricant in combination with oil or grease lubrication • Difficult moulding processes in metal working • For integration in plastics, seals and packings 	<ul style="list-style-type: none"> • Apparates and precision machinery, e.g. under the influence of oxygen, in vacuum or radioactive radiation • Tools or workpieces in cold- and thermoforming
		OKS 110 OKS 111*	MoS ₂ Powder, microsize	Operating temperature: -185 °C to +450 °C (up to +1,100 °C in vacuum, up to +1,300 °C in inert gas) Particle size: 2.5 – 5.0 µm, max. 15.0 µm	<ul style="list-style-type: none"> • grey-black • MoS₂ • wax (*only aerosol) 	<ul style="list-style-type: none"> • Run-in lubricant in combination with oils or greases • Prevents friction and wear, even at high pressures • Good adhesion, even at extremely precisionmachined surfaces • For difficult moulding processes • For pressing in bearings 	<ul style="list-style-type: none"> • Machine parts, apparates and precision machinery • For incorporation in plastics, sealings, packages, sintered metals